



### 75" High-bright Open Frame Display

The Agile Display Solutions 75" High-bright Open Frame Display is an extremely energy-efficient and durable LCD designed for outdoor kiosks and enclosures. With integrated video processing and AC or DC power supply, the 75" High-bright Open Frame Display is designed to integrate cleanly into enclosures, taking little space or depth, even when two displays are mounted back-to-back. With numerous available sensors, comprehensive system monitoring capabilities, and customizable firmware and bracketry.

### Key Features

- **Industry's Lowest Power Consumption**  
Consumes up to 35% less power than traditional LCD panels, to lower the carbon footprint of advertisers, municipalities and network operators
- **High Temperature Optical Stack**  
High temperature optical stack helps prevent sagging and yellowing due to high temperatures
- **Stunning Image Quality**  
4000-nits Brightness  
IPS High-Tni LCD Cell  
4K 60Hz Resolution  
0.429 mm Pixel Pitch  
200 Zones Local Dimming  
Circular Polarizer  
DP 1.2 and HDMI 2.0 Inputs  
Ethernet and RS232 Control
- **Unparalleled Durability**  
Fully Sealed Backlight  
Full Industrial Electronics and Power Supply
- **Customizable**  
Customizable firmware and hardware to integrate cleanly with your signage solution

### 75" High-bright Open Frame Display

#### LCD PANEL

Brightness	4,000 cd/m2
Contrast Ratio	1200:1
Viewing Angle	178°/178°
Response Time	8 ms
Supported Colors	10-bit (8-bit + FRC)
Display Resolution	3840 x 2160
Display Frame Rate	60 Hz
Color Gamut	72% NTSC
Local Dimming	200 zones
Portrait/Landscape	Portrait and Landscape
Polarizer	Circular
Technology	IPS, High-Tni

#### INPUT / OUTPUT

Input Connectors	DisplayPort x1 / HDMI x 2 / VGA / SPDIF Out
Communication Ports	Ethernet / RS232C / IR Extender

#### MECHANICAL

Dimensions	1675 x 962 x 95 mm
Mounting	400 x 400 VESA Custom Mounting Brackets available

#### SENSORS

Available Sensors	Temperature (with auto dimming) Ambient Light (with auto dimming) Particle, Humidity
-------------------	--

Max. Number of Sensors	10
------------------------	----



#### ELECTRICAL

Power Supply	AC 100V ~ 240V (50/60Hz)
Power Consumption (Typ)	323W
Power Consumption (Max)	706W

#### ENVIRONMENTAL

Operating Temperature	0°C ~ 50°C, 35% ~ 85% RH
-----------------------	--------------------------

#### INTERFACE

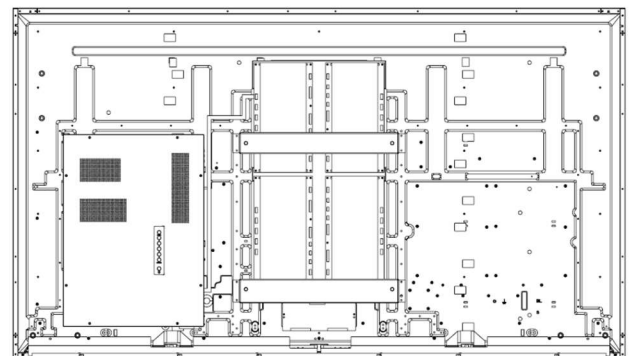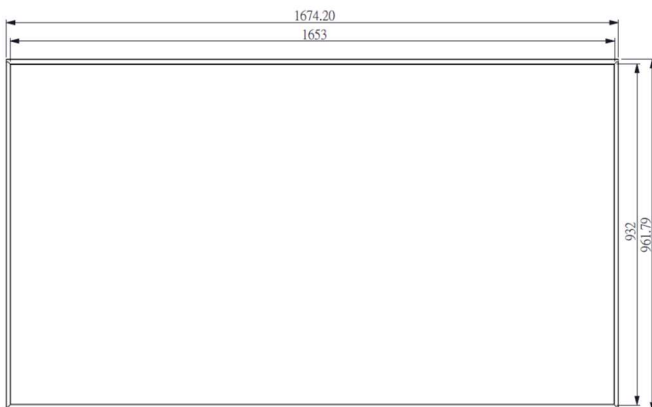

Official Website

\* All specifications subject to change