



## Solis 32

### 32" Solar Powered Wireless E Ink Poster - Evaluation Kit

The revolutionary Solis™ 32 from Agile Display Solutions is the first full-color digital display that requires no maintenance whatsoever. Using Spectra™ 6 technology from E Ink, it attaches to a wall or shelf as easily as a poster. Hang one, dozens, or thousands of displays, with no cables required, and never touch them again.


A top-mounted solar array powers the display indefinitely under normal store lighting. Control all displays and schedule content simply and wirelessly from your central office, using your existing CMS network. Setting up each display requires less than 5 minutes using a mobile app available on Apple's App Store or Google's Play Store. The future of retail display technology has truly arrived.

## Key Features

- **No Cables or Battery Charging Required**
  - Hang once, never touch again
  - Place in aisles, endcaps or areas where digital signage was previously impractical
  - Significantly reduces installation cost vs. LCD
  - Eliminates labor and improves ROI
- **The Most Sustainable Signage Solution, Period**
  - No printing, no errors, no shipping, no waste
  - Consumes no electricity whatsoever
  - Eliminates battery waste in landfills
  - Advances your company's ESG objectives
- **Configurable, to Fit Your Needs**
  - Accepts up to 3 Solar Modules per display, depending on your use requirements
  - Supports landscape and portrait
  - Works in a wide range of indoor lighting conditions
- **Compatible with your CMS Network**
  - ACE (Agile Conversion Engine) allows operating displays using existing CMS providers
- **Cutting-edge E Ink Spectra 6 technology**
  - 2560x1440 resolution, 65,000 colors
  - Renowned sheen and legibility of ePaper

### Solis 32 32" Solar Powered Wireless E Ink Poster

EVALUATION KIT	
Included in Kit	(1) Display, (2) Long Solar Modules, (1) Short Solar Module
DISPLAY	
Size	31.5"
Resolution	2560x1440 Pixels
Finish	Matte Reflective (Paper-Like)
Colors	65,000 Colors
Time To Change Image	approx. 18 Seconds
Portrait/Landscape	Mount Horizontally or Vertically
Construction	Aluminum
Mounting	100 x 100 VESA or D-Ring Picture Hangers
PROCESSING	
Storage	128 GB
Firmware Updates	Automatic Over-the-Air (OTA) Updates
CONNECTIVITY	
Wireless Connectivity	Wi-Fi
Supported File Formats	BMP, PNG, JPG, JFIF
Playlist Scheduling	Via ACE connection to CMS Provider
System Monitoring	Via ACE connection to CMS Provider
Provisioning and Setup	Using EPD Tool™ mobile app (iOS and Android)
POWER	
Solar Modules	Up to 3 Solar Modules per display
Supported Indoor Lighting Conditions	500-1000 lux, 12-24 hours per day
Nominal Battery Life	Unlimited battery life for up to 3 image changes per day <sup>1</sup>
ENVIRONMENTAL	
Operating Temperature	0 – 50 C
Operating Humidity	20 - 80% RH
DIMENSIONS	
Dimensions (Display Only)	423.8 x 709.1 x 34 mm (16.7 x 27.9 x 1.34 in)
Dimensions (Display with Solar Modules Attached)	440.9 x 719 mm x 67.4 (17.4 x 28.3 x 2.65 in)
Weight	4 kg / 8.8 lbs

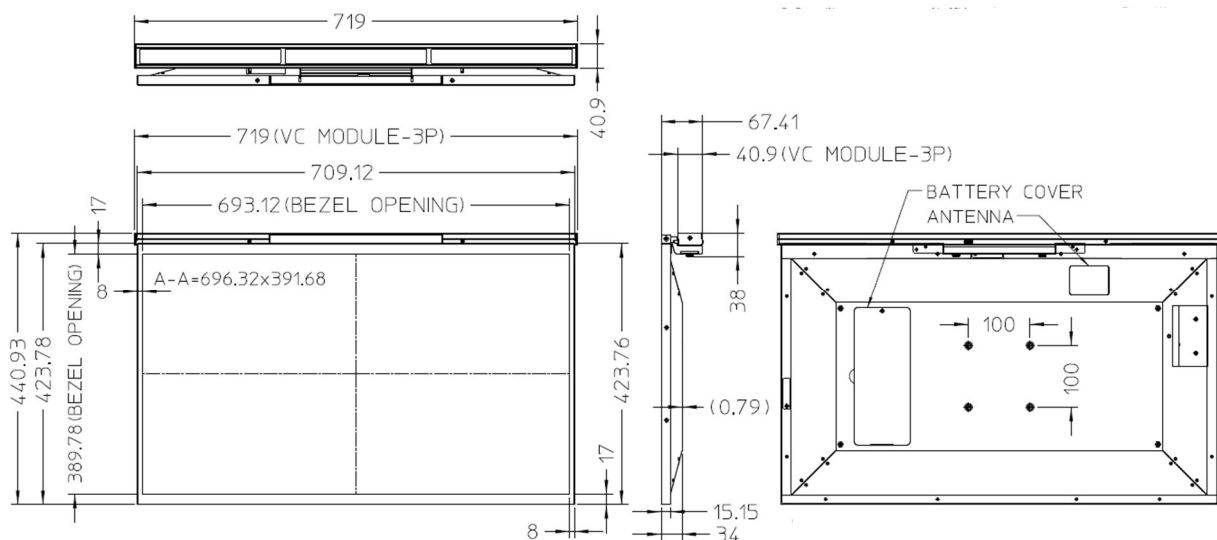

<sup>1</sup>Assumes 3 Solar Modules installed, 1000 lux @ 12 hrs/day

Patent pending. Specifications subject to change.