



75" ePaper Cassette

Outdoor ePaper Displays from Agile will transform the outdoor signage landscape. Not only do they have a lower carbon footprint than LCD or LED, but they even have a lower carbon footprint than backlit printed signs.


Using Kaleido™ 3 technology from E Ink, the Agile Display Solutions 75" ePaper Cassette drops in place of a 6-sheet poster box using the same mounting points and occupying the same volume. It allows you to change the content frequently without truck stops or visits, increasing ad revenue several-fold. A poster-like reflective image and adjustable front lighting will attract viewers, and the ultra-low power consumption will satisfy regulators.

Key Features

- **City-friendly Alternative to 6-sheet Backlit Posters**
 Fully-integrated IP56 Internet-connected digital poster
 Flicker-free reflective image with programmable front light
 1/10 the power of LCD or LED
 Complies with ordinances prohibiting bright or moving video
- **More Sustainable than Printed Signs**
 60W Average Power Consumption
 Avoids material waste and truck visits to swap out printed signs
- **More Durable than LCD or LED**
 Built-in air curtain to remove sunlight energy
 Internal heater for cold climates
 Reliable operation in -30 to 50C climates in full sunlight
- **Compatible with your CMS Network**
 Connects directly to the Internet for control, system monitoring and playlist scheduling
 ACE (Agile Conversion Engine) allows operating displays using existing CMS providers such as Navori™
- **Easy to Install in New or Existing Sites**
 Similar dimensions and mounting points as commonly available outdoor poster boxes

75" ePaper Cassette

| DISPLAY | |
|---|---|
| Size | 75" |
| Resolution | 5120 x 2880 Pixels |
| Finish | Matte Reflective (Paper-Like), 4-5% Haze |
| Viewable Area | 1647.26 x 925.54 mm (64.85 x 36.44 in) |
| Pixel Density | 79 PPI |
| Colors | 13.9 million |
| Time To Change Image | Approx. 2.5 Seconds |
| Configurations | Single-sided or Dual-sided |
| CONNECTIVITY | |
| IO Connectors | USB 3.0, Wired Ethernet (RJ45) |
| Supported File Formats | BMP, PNG, JPG, JFIF |
| Playlist Scheduling | Via ACE connection to CMS Provider |
| System Monitoring | Via ACE connection to CMS Provider |
| Provisioning and Setup | Using ePaper Tool™ mobile app (iOS and Android) |
| LIGHTING AND SENSORS | |
| Front Light | Laminated Front Light Film |
| Front Light Properties | 150 cd/m2 Luminance, 70% Uniformity |
| Sensors | Temperature, Ambient Light, Humidity and Door Sensing |
| POWER | |
| Input | 100-240 VAC 50/60 Hz |
| Power Consumption (Average over Typical Year) | 60W |
| ENVIRONMENTAL | |
| IP Rating | IP56 |
| Operating Temperature | -30 to 50 C in Full Sunlight |
| MECHANICAL | |
| Dimensions (Dual-sided Configuration) | 2679 x 1370 x 261.3 mm (105.5 x 53.9 x 10.29 in) |

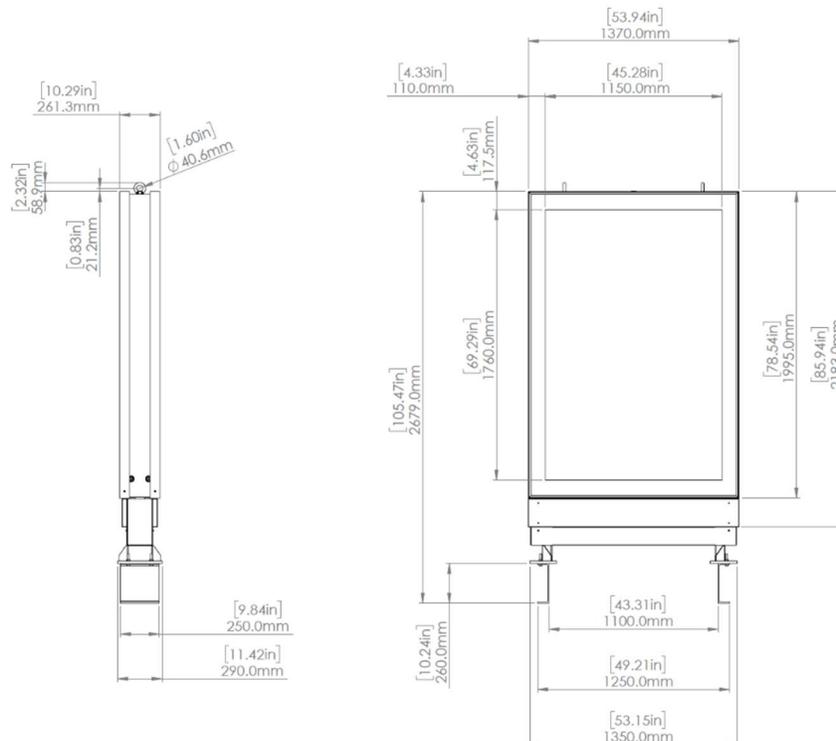

Specifications subject to change.